


**NEW**

# PROTEGO<sup>®</sup> ExU

Clog-free protection

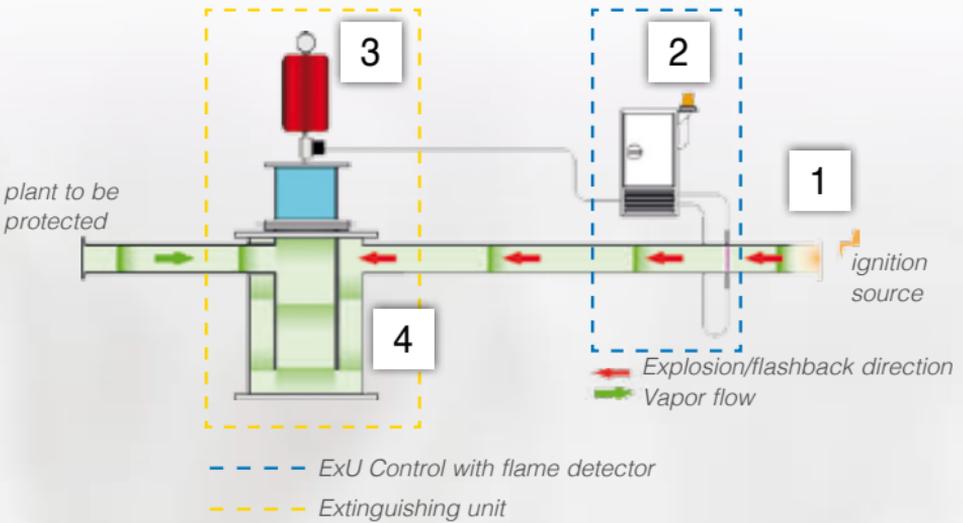

## Description

- 1 Flame spreads from ignition source
- 2 Flame detector registers flame
- 3 ExU-control actuates quenching unit
- 4 Quenching media rushes from extinguishing unit into the reservoir



**Flame is extinguished**



for safety and environment

## **Advantages / Characteristics**

- No crimped metal element to clog, great for vapor streams with high particulate content
- Predictable, steady pressure drop for IIA and IIB3 vapors
- Further explosions are stopped by residual fluid in the reservoir
- Provides deflagration protection for vapors of explosion groups IIA, IIA1, IIB1, IIB2 and IIB3
- Available for nominal sizes DN80/3" and DN150/6"
- All wetted parts are made from stainless steel or PTFE

**Feel free to contact us with any questions.  
The PROTEGO® Team is ready to advise you.**

## **CONTACT**

Braunschweiger Flammenfilter GmbH

Industriestrasse 11

38110 Braunschweig

Germany

phone: +49 (0) 5307-809-0

fax: +49 (0) 5307-7824

email: [office@protego.com](mailto:office@protego.com)

**[www.protego.com](http://www.protego.com)**